


IR FIXED LENS DOME CAMERA

DI-390IPS28
DI-390IPS36

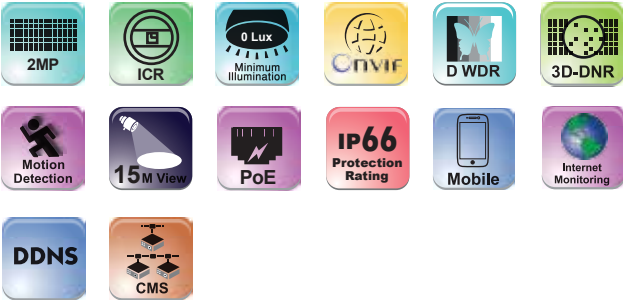

1/3" CMOS Sensor
2 Mega-Pixel
True Day & Night (IR Cut Removable)
0 Lux (IR On) Min. Illumination
ONVIF

Digital WDR
3D Noise Reduction
Motion Detection and Privacy Masking
2.8/3.6mm Mega-Pixel Lens
15m IR Illumination

PoE Support
IP 66 Protection

Specifications

Camera	Model	DI-390IPS28	DI-390IPS36
		Video	Image Sensor
	Effective Pixels	1920x1080	
	Electronic Shutter	1/25s ~ 1/100000s	
	Frame Rate	1-25/30FPS	
	Day & Night	ICR	
	Min. Illumination	0lux (IR ON)	
Audio	Audio compression	No	
	Communication	No	
Image Enhancement	Image Settings	AWB, AGC Adjustable Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable	
	Image Enhancement	Digital WDR, ROI	
	Noise Reduction	3D-DNR	
	Image Orientation	Mirror/Flip	
	Privacy Zone	Yes	
	Motion Detection	Yes	
	Video Compression	H.264	
Compression	Resolution	1080P (1920x1080), 720P (1280x720), D1 (704x567), CIF (480x240)	
	Multi-stream	1920x1080 (1~30fps) / 1280x720 (1~30fps) D1 (1~30fps) / HD1 (480x240) CIF (1~30fps)	
	Bit rate	64Kbps ~ 10Mbps	
	Encode Mode	VBR/CBR	
	Image Quality	Five levels under VBR; Free adjustment under CBR	

Housing	IR Distance	15m (2 High Power IR LED)	
	Lens	2.8mm	3.6mm
	Iris	Fixed Iris	
	Lens Mount	Φ14 mount	
	Protection Rate	Water Proof: IP66	
	Bracket	3-Axis Wall Bracket	
	Dimensions	Ø107mm×95mm	
Connectivity	Weight(gross)	400g	
	Network	RJ45 (+PoE)	
	Power	DC Socket	
	Analog Video Output	No	
	Mic Connectivity	No	
	SD Card	No	
	RS485	No	
Network	Alarm	No	
	Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App	
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission	
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP	
	ONVIF	Yes	
Others	Ethernet	100Mbps	
	PoE	Yes	
Power Supply	Power Supply	DC12V/-280mA / PoE/-4W	
	Work Environment	-30 C~50 C, 10%~90% Humidity	

