

## 8/9/16CH Power Supply

## Features:

- High efficiency and environmental friendly design Thermal Fuses
- Optimal design for easy installation
- Stable power signal to support clear images
- Over-current protection
- "Over-voltage" output protection
- Short circuit protection
- Lock
- Individual Status LED for each Channel



MODEL	PR-5A8CH-B	PR-10A9CH-B	PR-5A8CH	PR-10A9CH	PR-12A16CH	PR-20A16CH(1U)
Output Terminals	8 Ports	9 Ports	8 Ports	9 Ports	16 Ports	16 Ports
Input Voltage	AC100~240V	AC100~240V	AC100~240V	AC100~240V	AC100~240V	AC100~240V
Frequency	47~63HZ	47~63HZ	47~63HZ	47~63HZ	47~63HZ	47~63HZ
Output Voltage	DC12V	DC12V	DC12V	DC12V	DC12V	DC12V
Output Current	5Amp	10Amp	5Amp	10Amp	12Amp	20Amp
Output Volt-Regulation Precion	DC12~15V	DC12~15V	DC11~15V	DC11~15V	DC11~15V	DC11~15V
Over Current Protection	6A ±5%					
Ripple & Noise	≤ 120mVp-p	≤120mVp-p	≤ 120mVp-p	≤ 120mVp-p	≤120mVp-p	≤120mVp-p
Efficiency	≥ 85%	≥ 85%	≥ 85%	≥ 85%	≥ 85%	≥ 85%
Backup Battery Support	Yes	Yes	No	No	No	No
Housing	Power Box	1U Rack Mountable				
Dimensions	205 x 165 x 75mm	330 x 255 x 80mm	204 x 190 x 60mm	290 x 220 x 70mm	290 x 220 x 70mm	440 x 225 x 45mm
Weight	1.42 Kg	3.15 Kg	2.15 Kg	2.45 Kg	2.45 Kg	3.5 Kg

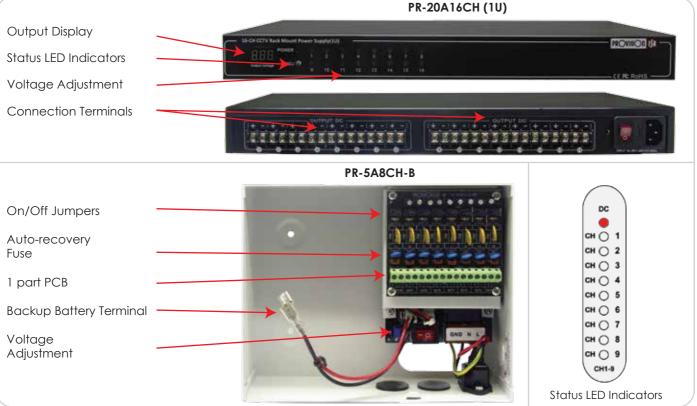

## PR-20A16CH (1U)