

## PnV Series


Quick set-up, easy to use, smart, and cost-effective: Provision-ISR's Plug & View cameras are ideal for monitoring your home, office, or business day & night. Connect to your camera anytime, anywhere, simply using your smartphone or tablet and Provision ISR's free app (compatible with Android and iOS).



# PT-848

## INDOOR PAN/TILT IR FIXED LENS CAMERA

The new PT-848 is the latest camera in the PnV series. Alongside a unique and sleek design, we have added AI analytics support for short distances to make a complete security suit perfectly tailored to your needs.

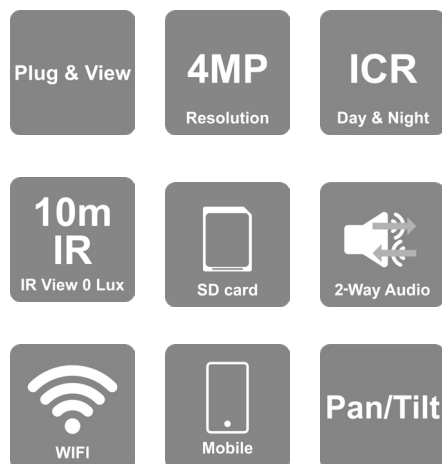

### MAIN FEATURES

4 Mega-Pixel camera  
Day & Night Vision  
Advanced H.264+ Compression  
2-Way Audio with Built-in Speaker/Microphone  
Local recording on Micro SD  
Wireless support (802.11b/g/n/ac)  
Motion detection

iOS/Android Mobile App:  
- Live view  
- Gesture Control  
- Remote playback  
- Local SnapShot/video recording



## SPECIFICATIONS

Camera	Video	Image Sensor	1/3" CMOS
		Effective Pixels	2560×1440
		Sync System	Progressive Scan
		Electronic Shutter	1/50s ~ 1/100000s
		Day & Night	ICR (Auto)
		Min. Illumination	0.5 Lux (Color), 0.1 Lux (B&W with IR on)
	Audio	Compression	ADPCM
		Communication	Two-way Audio (built-in Microphone & Speaker)
	Image Enhancement	Image Settings	Brightness & Contrast
		WDR Range	No
		Noise Reduction	3D-DNR
		Image Orientation	Mirror/Flip
		Privacy Zone	No
		Motion Detection	Yes
	Compression	Video Compression	H.264 main profile/H.264+ main profile/Motion-JPEG/JPEG
		Resolution	Main stream: 1440p(2560×1440)@25fps Substream: 360p(640×360)@15fps
		Multi-Stream	Dual Stream
		Bit-Rate	128Kbps ~ 4Mbps
Encode Mode		VBR	
Image Quality		Main stream and Substream	
Pan/Tilt	Pan	348°	
	Tilt	70°	

## SPECIFICATIONS

Housing	IR Distance	10m (6pcs)
	Lens	4.0mm@F2.3 (84° Diagonal)
	Iris	Fixed
	Lens Mount	Φ14 mount
	Water-Proof	No
	Bracket	No
	Dimensions	170x150x108mm(L×W×H)
	Weight	190gr
Connectivity	Network	RJ45 + WiFi (802.11 b/g/n/ac)
	Power	DC Socket
	Analog Video Output	No
	Audio Connectivity	No (Built-in Speaker and Microphone)
	SD Card	Micro SD (256GB Max)
	RS-485	No
	Alarm	No
Network	Remote Monitoring	Provision PnV2 Mobile App
	User Access	Supports simultaneous monitoring of up to 4 users
	WPS	No
	ONVIF	No
	Ethernet Speed	100Mbps
	PoE	No
Others	Power Supply	DC12V/1A (540mA)
	Work Environment	-10°C~50°C, 10%~90% Humidity